


HIGH PRESSURE FLEXIBLE CONNECTOR


Model 243

NOL-TEC EUROPE S.r.I.



Via Milano, 14/N - 20064 Gorgonzola Tel.: +39-02-9516875 Fax: +39-02-9511473 E-mail: sales@nol-teceurope.com Sito web: www.nol-teceurope.com

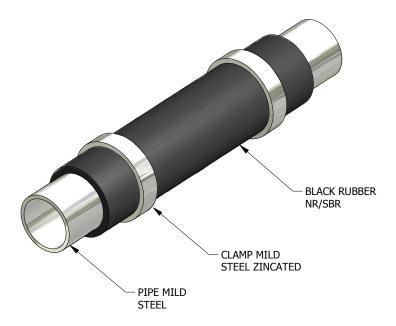

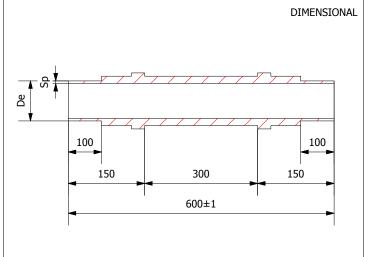

| COD.NTE | SIZE | De (mm) | Th (mm) | helix steel wire |
|---------|--------|---------|---------|------------------|
| 58972 | 2" | 60.2 | 3.91 | no |
| 58968 | 2 1/2" | 73 | 5.16 | no |
| 58973 | 3" | 88.9 | 5.49 | no |
| 58969 | 4" | 114.3 | 6.02 | no |
| 59970 | 5" | 141 | 6.55 | yes |
| 58970 | 6" | 168.3 | 7.11 | yes |
| 58967 | 8" | 219.1 | 8.18 | yes |

STANDARD FEATURES

Plane End for Compression Coupling. Mild Steel:

- External: Black Rubber, Wear Resistant
- Backing: Black Rubber with Electrical Continuity
- Reinforced with high strenght syntetic fabrics
- Aisi 304:
- External: Black Rubber, Wear Resistant
- Backing: White Rubber with Electrical Continuity
- Reinforced with high strenght syntetic fabrics

OPTIONAL FEATURES

- Custom Design
- Electrical Continuity Test Report
- Flanged or Grooved Ends for Coupling
 Aisi 304 HD: pipe with reduced flexibility for very abrasive products

SPECIFICATIONS

- Temperature: -40 C°. to +70 C°.

- Working Pressure: 6 bar max.

FLEXIBLE PIPELINE IN BLACK RUBBER WITH SMOOTH END, IDEAL FOR CONNECTIONS WITH COMPRESSION COUPLINGS.

SPECIAL DESIGN FOR MINIMIZE INTERNAL PIPE PRESSURE IMPROVES PNEUMATIC CONVEYING SYSTEM.

SUITABLE FOR ANY PNEUMATIC CONVEYING SYSTEM IN DENSE PHASE.